

- Two Lamp
- Multi-Watt
- Small Case Size
- High Heat
- Lightweight
- Energy Saving



## Features & Benefits

Wide lamp versatility, suitable for two F15T8, F17T8, F20T12, CFQ13W/G24q, CFTR13W/GX24q, CFT13W/2GX7, CFQ18W/G24q, CFTR18W/GX24q, FT18W/2G11, OR CFM18W/2G10 lamps

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Eliminates strobing

Thermal potting

Metal enclosure

Rapid Start




## SPECIFICATIONS

- Operating Voltage: 120VAC  $\pm$  10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection


- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Operating Temp: 0°F (-17.78°C)

- Max. Case Temp: 194°F (90°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

## DIMENSIONS

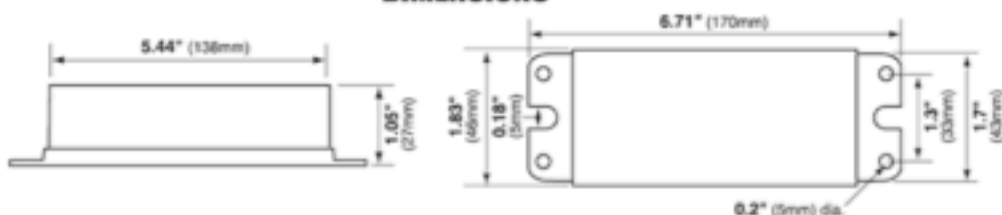

## WIRING DIAGRAM



Weight: 13 oz. Case Quantity: 50pcs Case Weight: 35 lbs Standard Lead Length: black/white-24" blue/red-34"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	F15T8	0.323	20.3	0.52	1.7	0.58	114	0°F
120	*F17T8	0.446	21.3	0.52	1.5	0.56	114.2	0°F
120	F20T12	0.338	22.2	0.55	1.7	0.50	114.2	0°F
120	*CFQ13W	0.40	23.2	0.53	1.48	0.83	114.4	0°F
120	CFTR13W	0.38	23.9	0.52	1.6	0.84	114.3	0°F
120	*CFT13W	0.30	17.4	0.50	1.49	0.66	114.5	0°F
120	*CFQ18W	0.42	26.7	0.545	1.44	0.76	115.4	0°F
120	CFTR18W	0.44	28.1	0.53	1.5	0.75	114.9	0°F
120	FT18W/2G11	0.35	21.4	0.508	1.7	0.58	115	0°F